

Luymar

... un uso eficiente del aire

VENTILACIÓN DOMÉSTICA

Extractores de Baños y Aseos




VENTILADORES DE CONDUCTO GAMA TT - Silent




MODELO		Caudal	W	RPM	A	dB (A)	Kg	Uds/caja
TT Silent 100*	min	170	24	2030	0,10	24	4,6	1
	max	240	26	2630	0,11	29		
TT Silent 125*	min	230	25	1650	0,11	23	4,6	1
	max	340	30	2310	0,13	28		
TT Silent 150*	min	405	45	1970	0,20	26	6,1	1
	max	555	52	2645	0,23	33		
TT Silent 200*	min	810	78	2015	0,35	31	8,0	1
	max	1020	110	2445	0,49	36		
TT Silent 250*	min	1050	127	1965	0,52	34	15	1
	max	1330	178	2495	0,79	38		
TT Silent 315*	min	1530	213	1975	0,93	36	25	1
	max	1950	313	2545	1,41	40		

* Producto disponible en Stock.

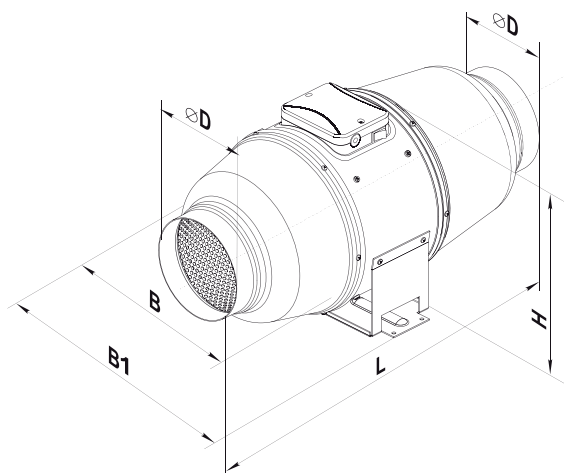

Modelos 100 / 125 / 150






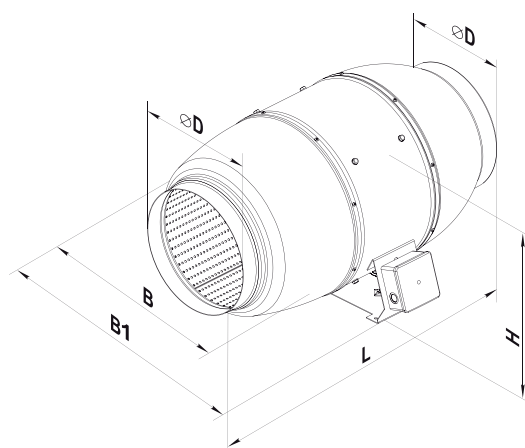


Modelos 200 / 250 / 315


DIMENSIONES

MODELO	DIMENSIONES (mm)			
	ØD	B	H	L
TT 100	96	167	190	246
TT 125	123	223	250	295
TT150	146	223	250	295
TT160	158	233	250	295
TT200	199	239	261	295,5
TT250	247	287	323	383
TT315	310	362	408	445

VENTILADORES IN-LINE GAMA TT - Silent

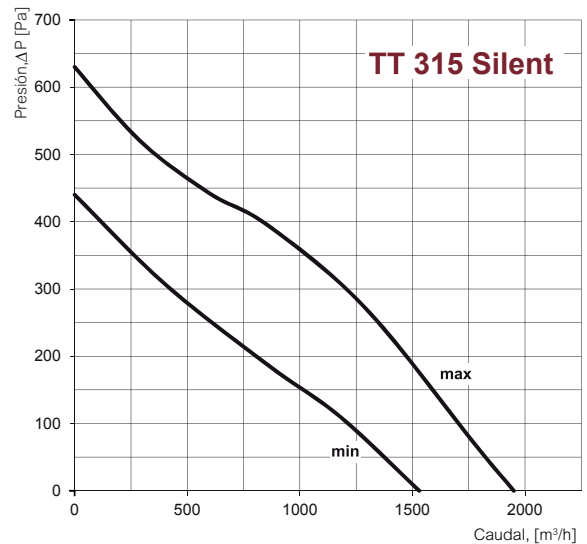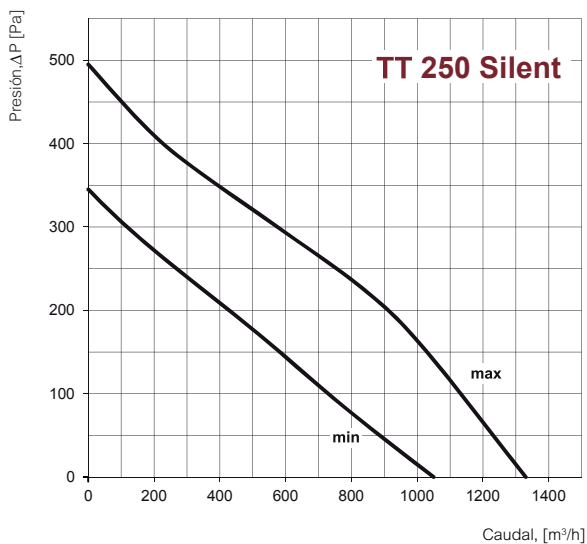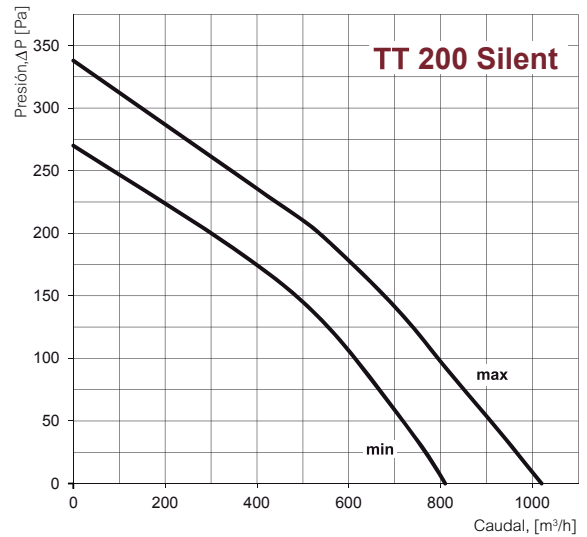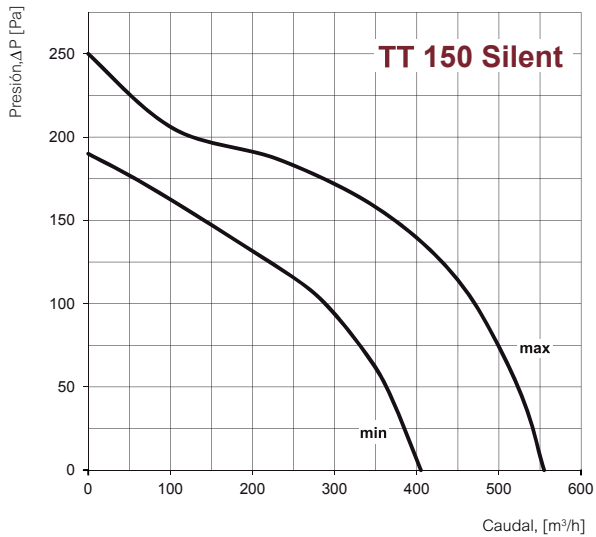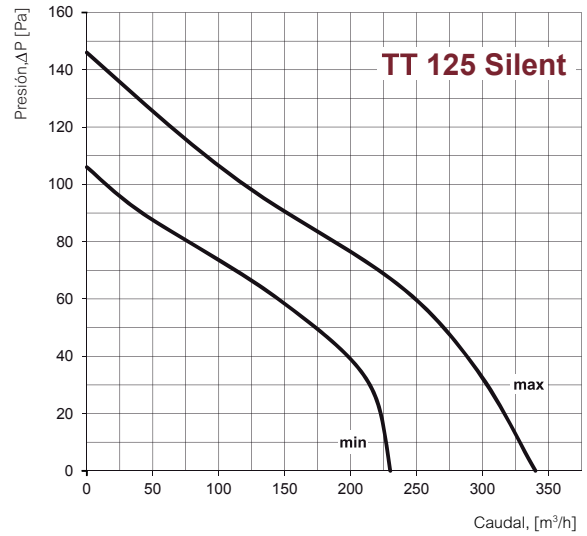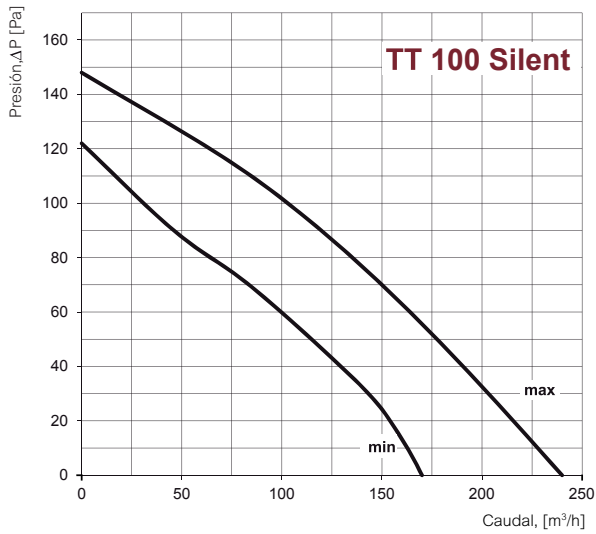


VENTILADORES DE CONDUCTO

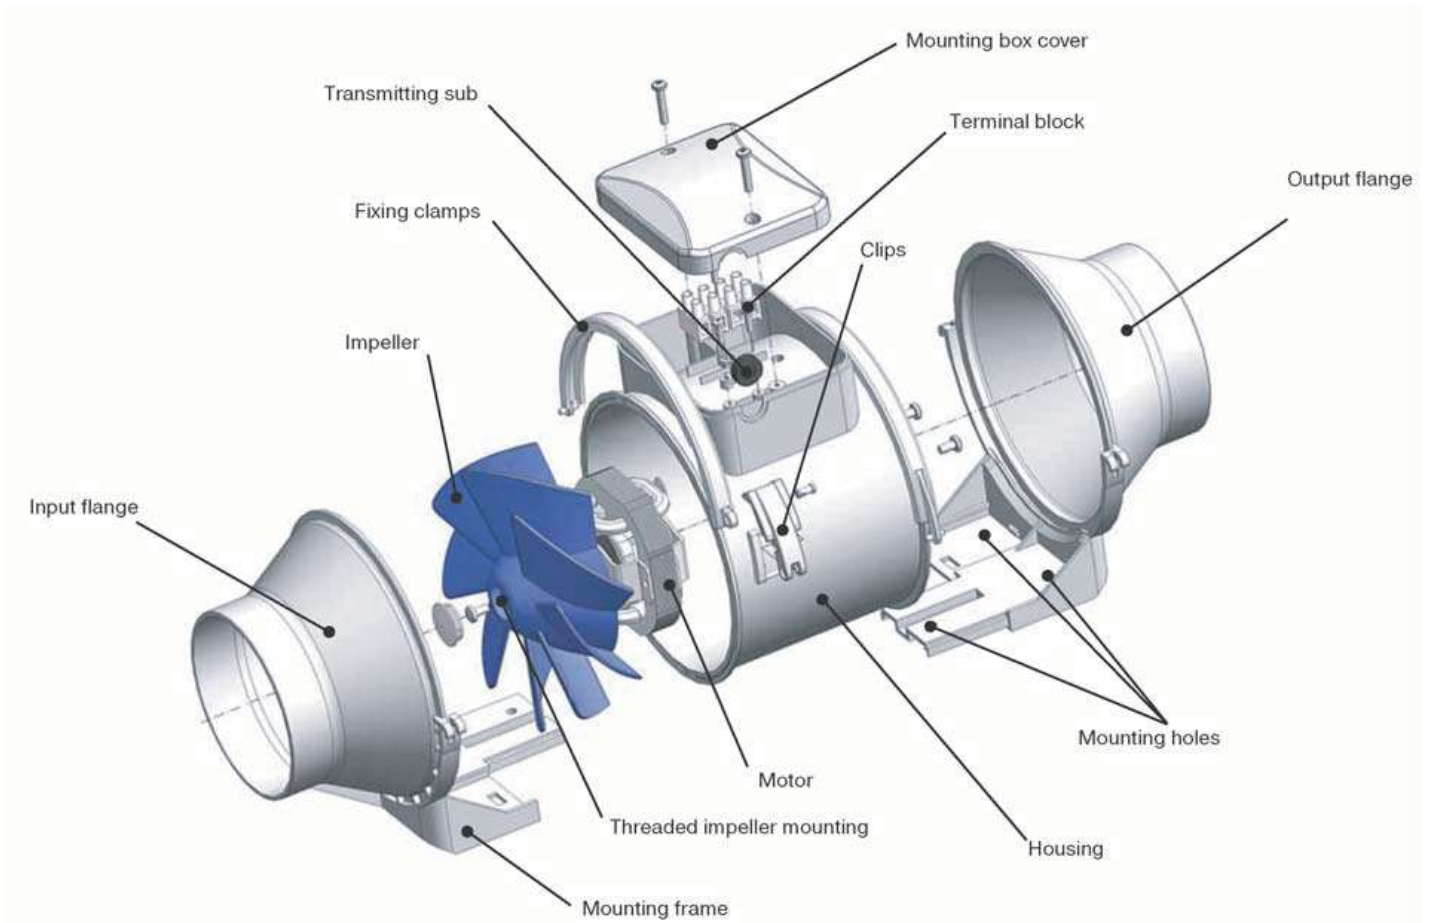

VENTILADORES DE CONDUCTOS TT - en serie




100

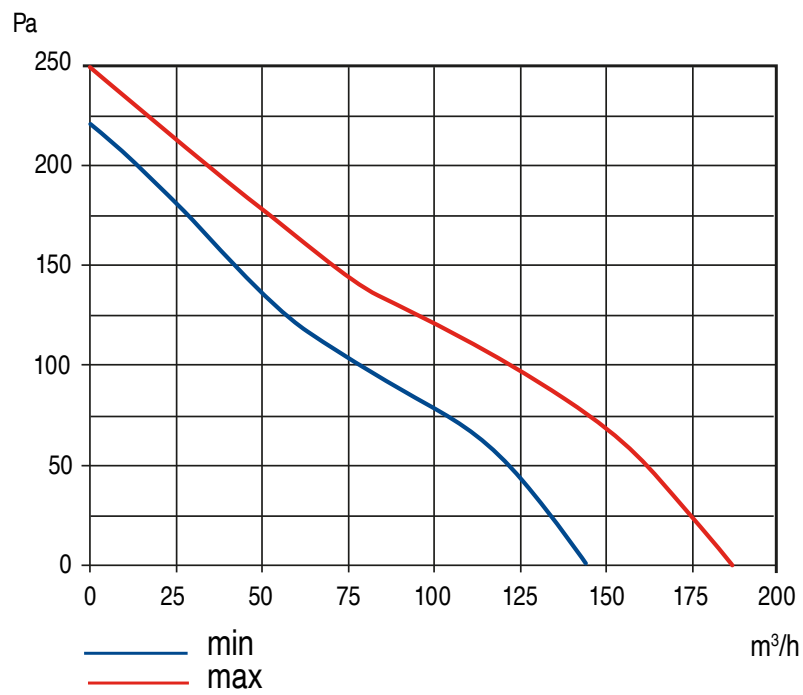


Luymar



125

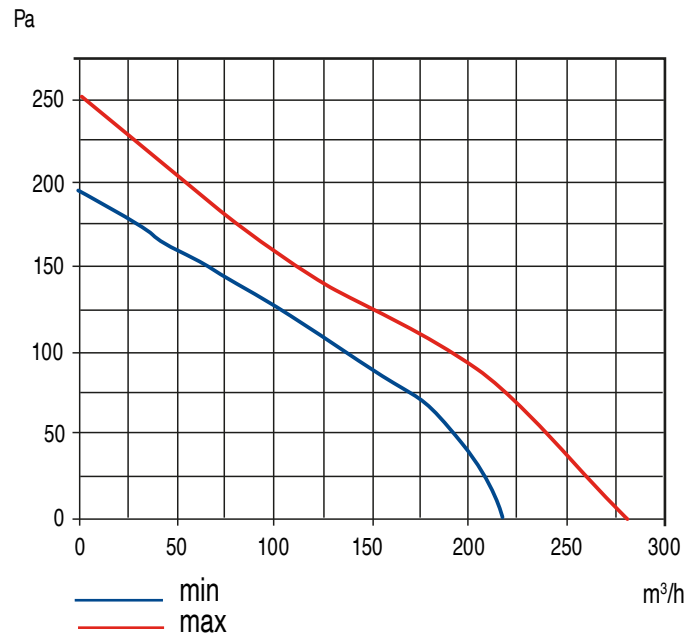


125-S

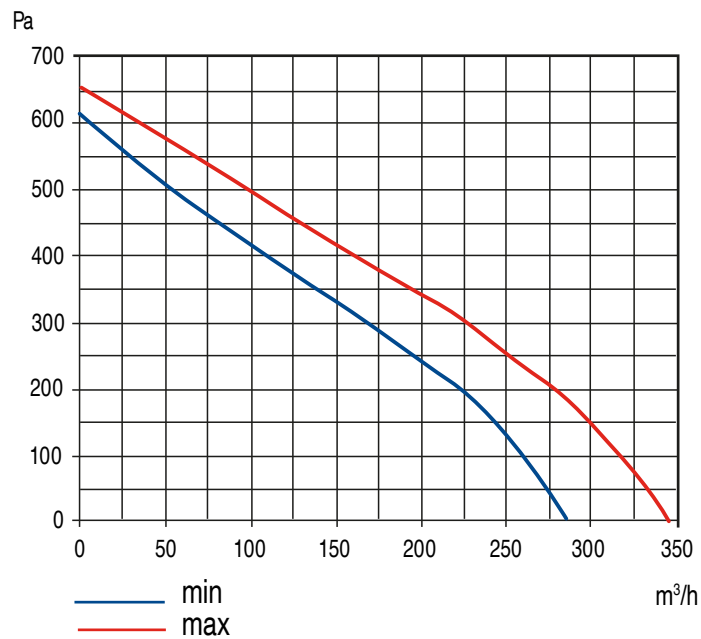




150

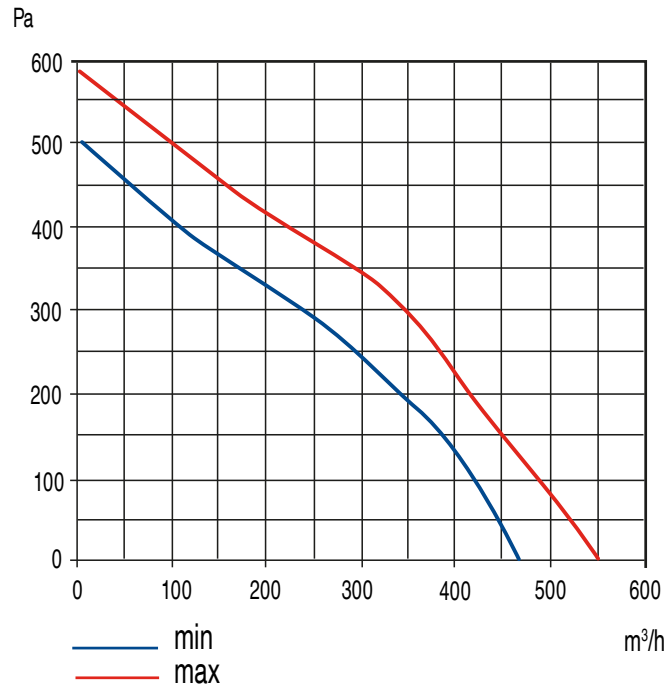

160

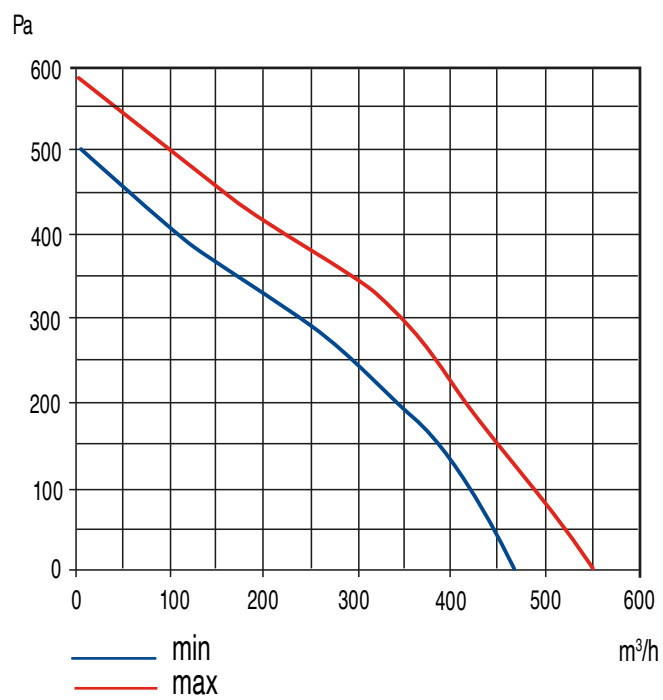



200

