

Luyamar

... un uso eficiente del aire

VENTILACIÓN DOMÉSTICA

Extractores de Baños y Aseos




VENTILADORES DE CONDUCTO GAMA TT



MODELO		Caudal	W	RPM	A	dB (A)	Kg	Uds/caja	Código
TT 100 *	min	145	21	2180	0,11	27	1,4	8	03000710...
	max	187	33	2385	0,21	36			
TT 125S *	min	240	28	1850	0,12	31	3	4	03000712...
	max	320	54	2510	0,16	42			
TT 150 *	min	405	30	1680	0,17	33	3	4	03000715...
	max	520	60	2460	0,27	44			
TT 160 *	min	405	30	1680	0,17	33	3	4	03000716...
	max	520	60	2460	0,27	44			
TT 200 *	min	830	76	1915	0,34	45	4	4	03000720...
	max	1040	108	2380	0,48	52			
TT 250 *	min	1110	125	1955	0,54	47	8	2	03000725...
	max	1400	177	2440	0,79	55			
TT 315 *	min	1570	230	1980	1	49	12	2	03000731...
	max	2050	320	2660	1,42	58			







* Producto disponible en Stock.

DIMENSIONES

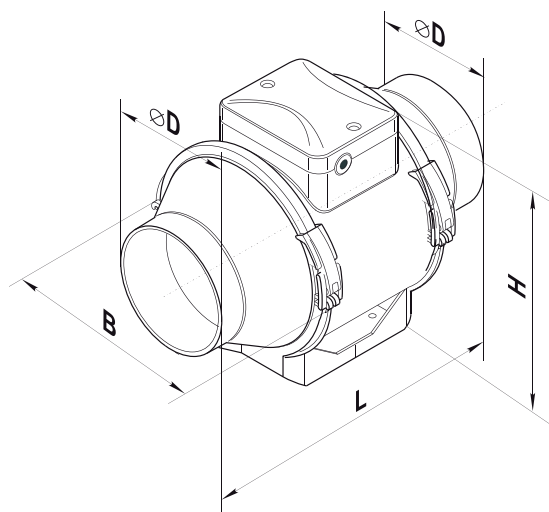


MODELO	DIMENSIONES (mm)			
	ØD	B	H	L
TT 100	96	167	190	246
TT 125	123	223	250	295
TT150	146	223	250	295
TT160	158	233	250	295
TT200	199	239	261	295,5
TT250	247	287	323	383
TT315	310	362	408	445

VENTILADORES IN-LINE GAMA TT

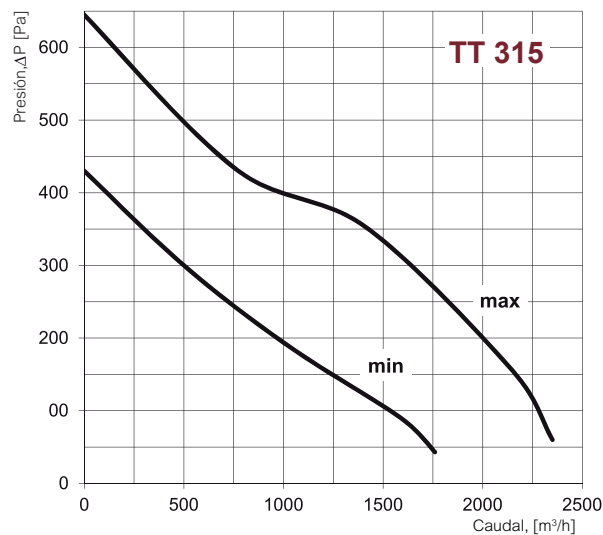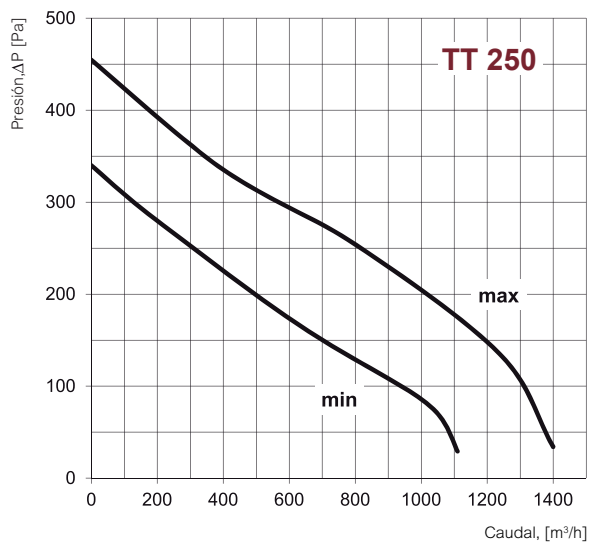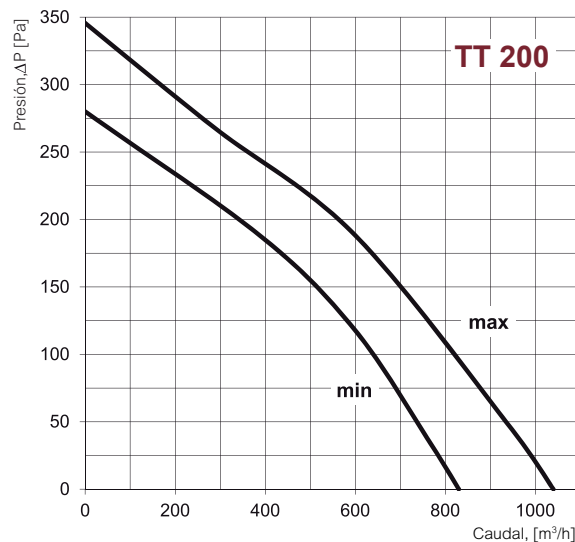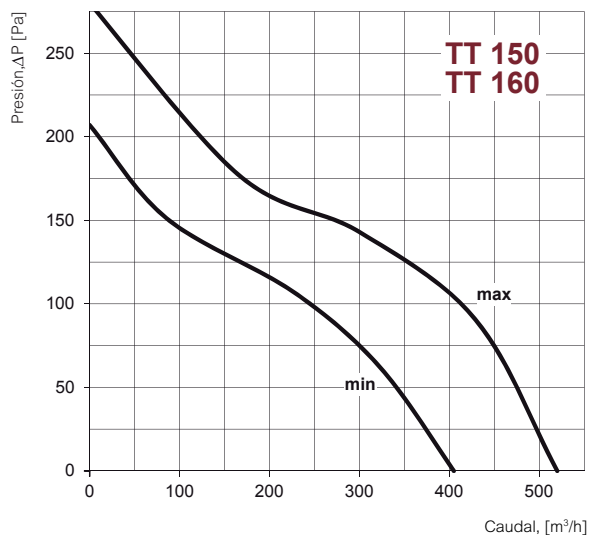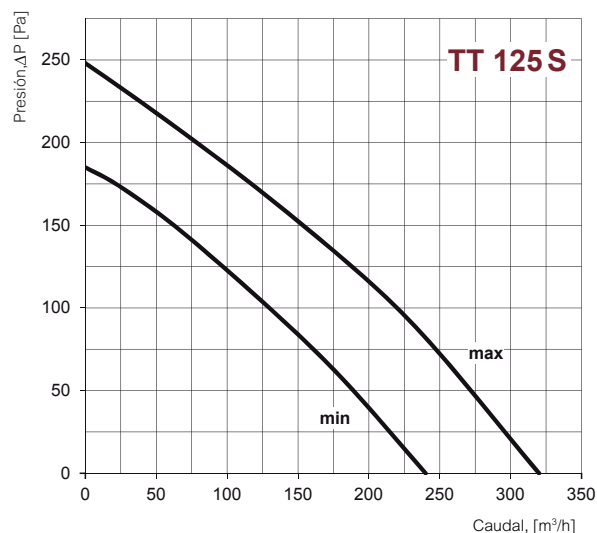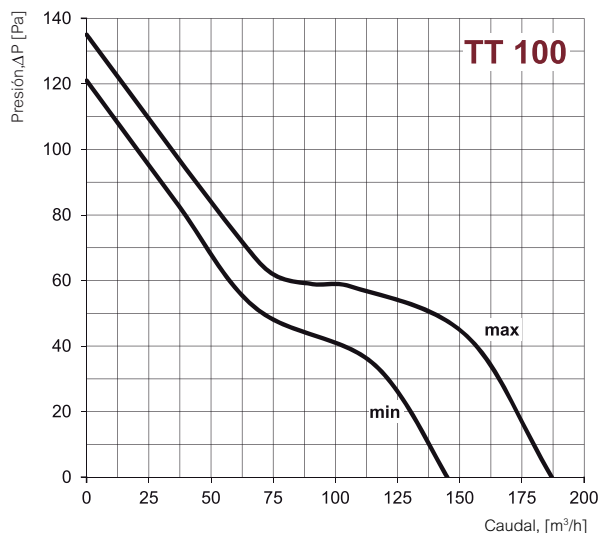


VENTILADORES DE CONDUCTO

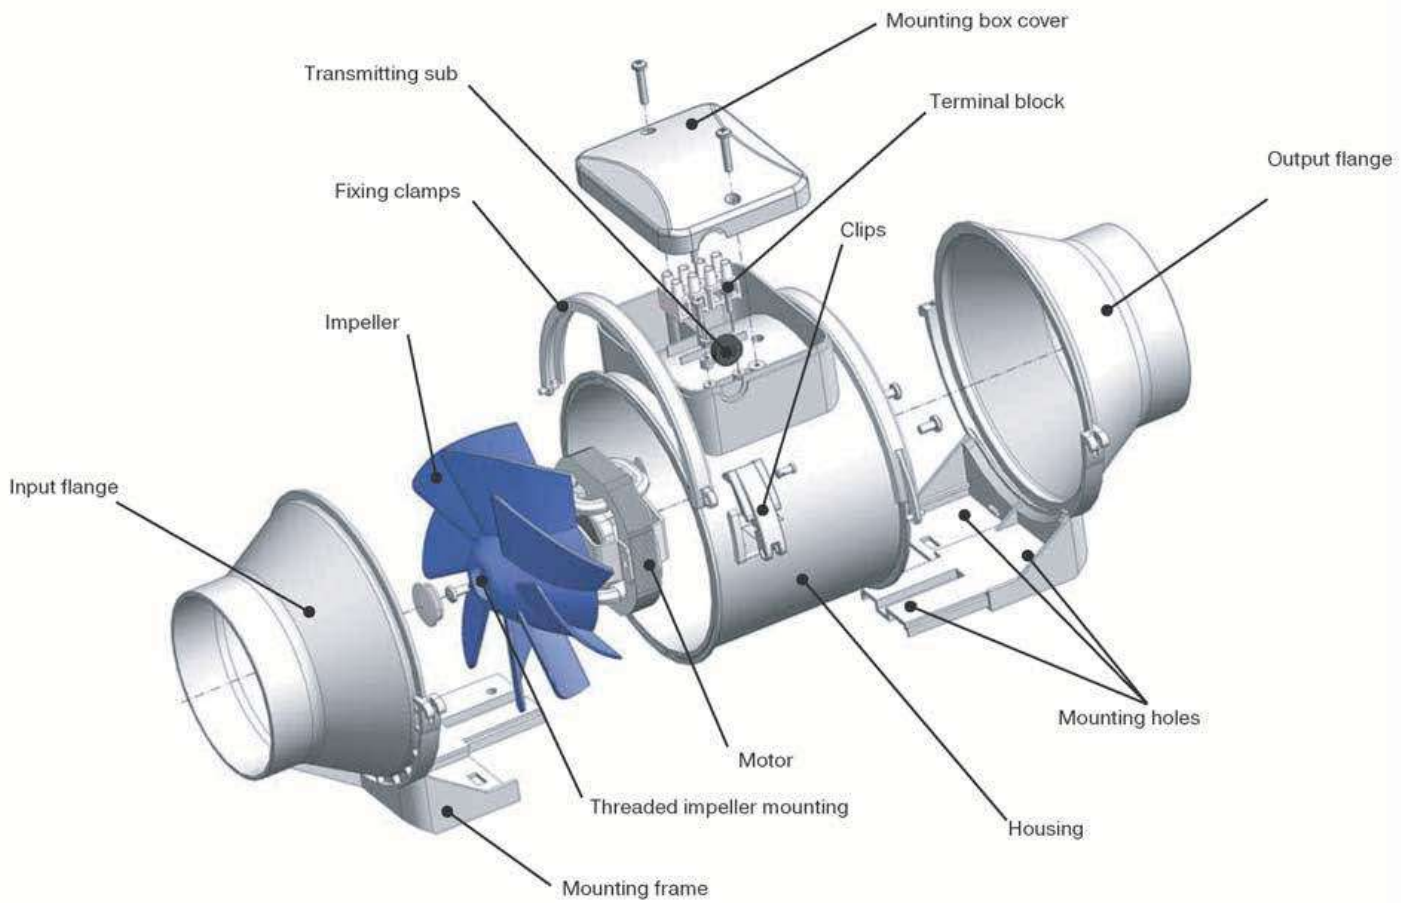

VENTILADORES DE CONDUCTOS TT - en serie




100

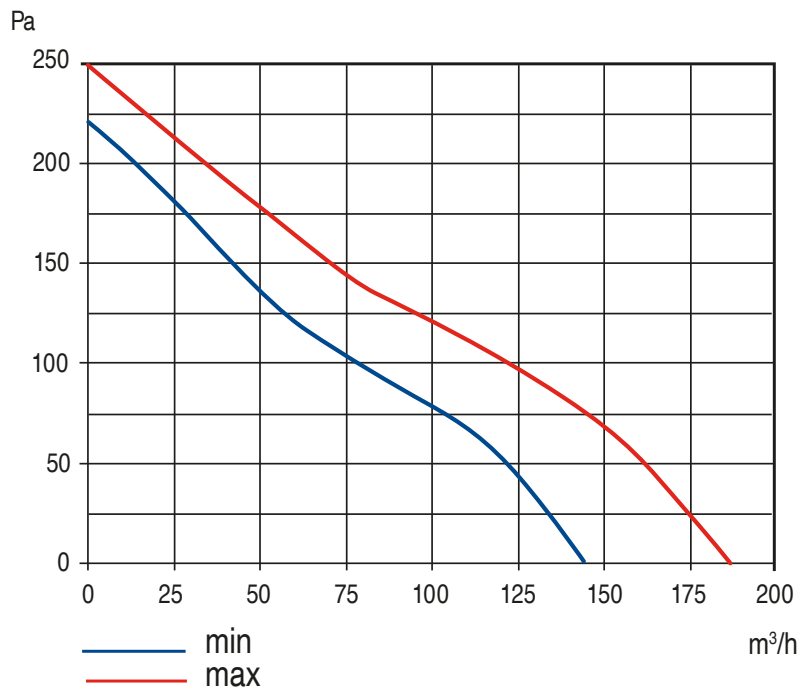


Luymar



125

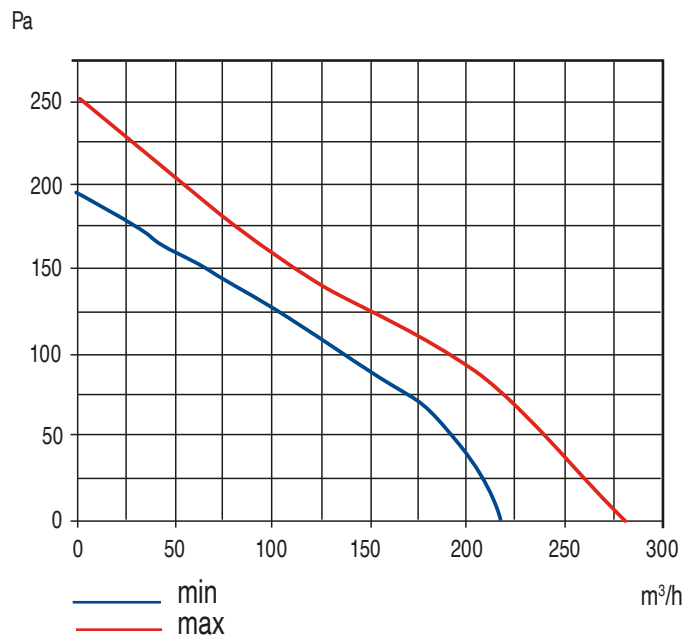


125-S

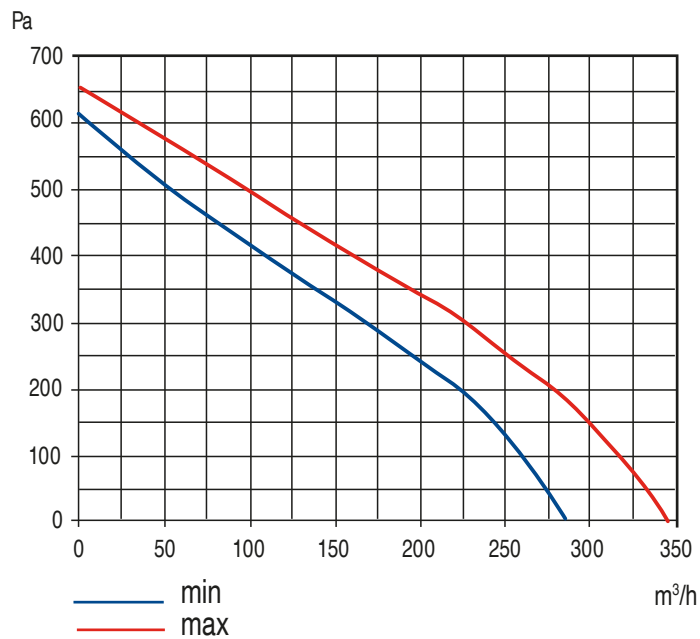




150

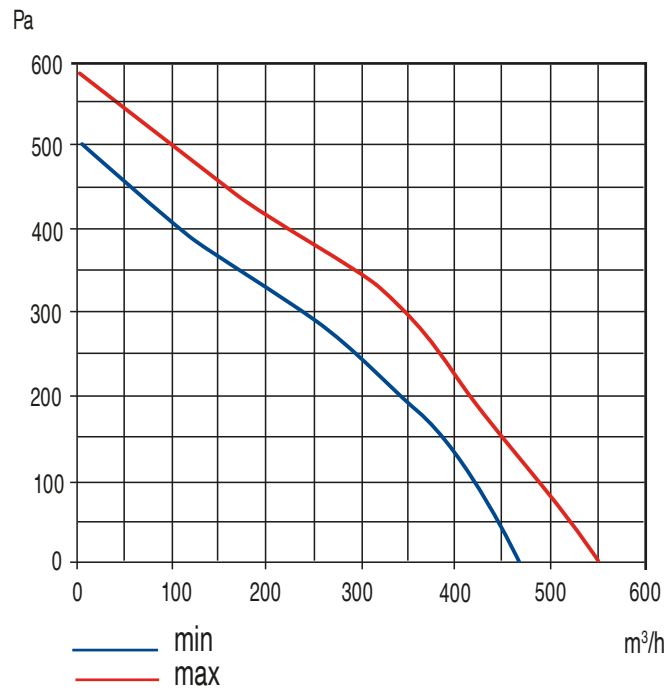

160

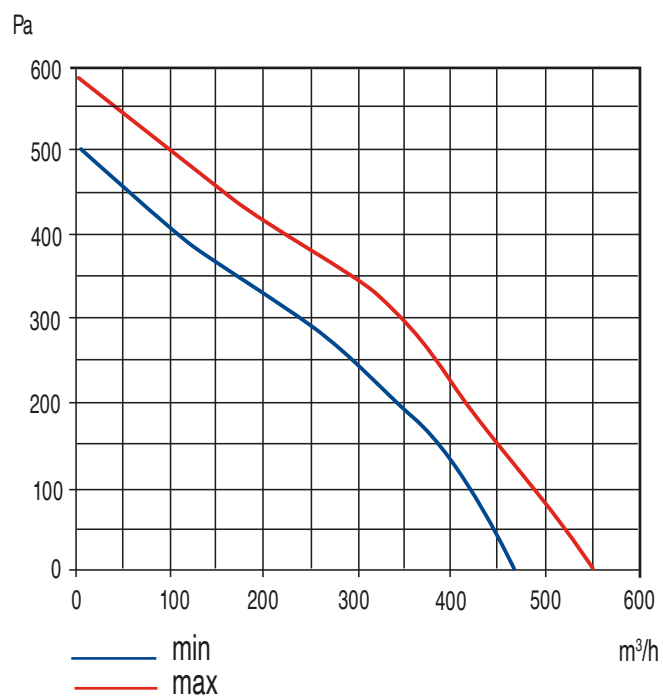



200

